


Feature :

1. 3U fanless rackmount server chassis design for Mini-ITX system with TDP 65W or less.
2. Adjustable heat pipe provides excellent compatibility.
3. Support 3 x full size expansion cards
4. Support 2 x 3.5" Serial ATA trays.
5. Support Slim ODD and IR receiver (optional).



Specifications :

Front Panel	<ul style="list-style-type: none"> ● Power switch x 1. ● Power LED x 1. ● HDD LED x 1. ● USB 2.0 Ports x 2. (3.0 optional) ● 3.5" Serial ATA trays x 2. ● Slim ODD x 1. ● IR receiver x 1 (optional).
Back Panel	<ul style="list-style-type: none"> ● Standard I/O shield x 1. ● Expansion slot x 3 (PCI/PCI-e, full length). ● Terminal block x 1.
Internal Structure	<ul style="list-style-type: none"> ● Standard memory height. ● 2.5" HDD x1.
Dimension (WxDxH)	19.00 x 10.53 x 5.20 inch (481.8 x 267.55 x 132.0 mm)
Material	SPCC with nickel eletroplating. Brushed aluminum panel with anodized.
Surface	Black wet paint with texture coat.

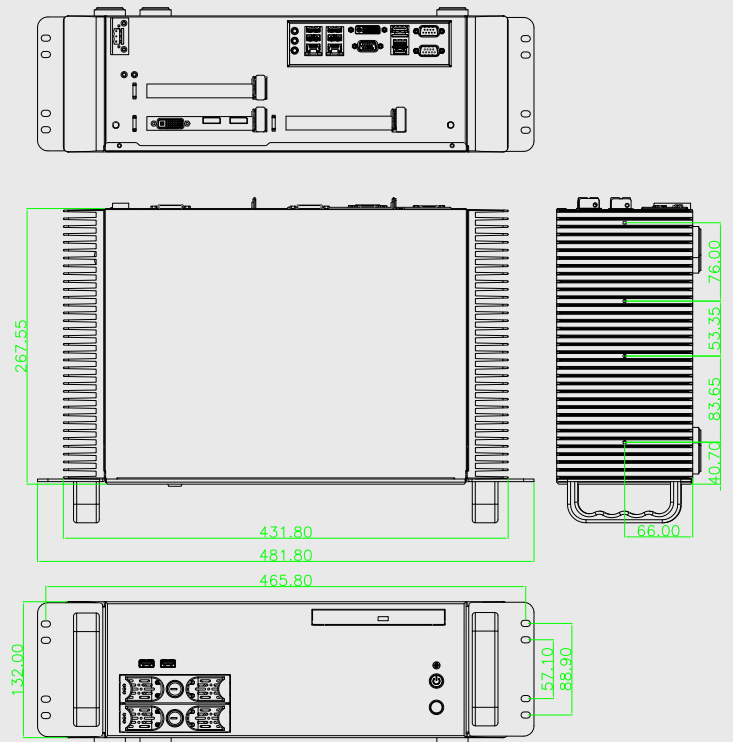

Power Solutions :

Converter: C4 150W 19V~24V DC in to ATX
Adapter: 90W / 120W

UNIT:mm