


### Feature :

1. 3U fanless rackmount server chassis design for Micro-ATX system with TDP 65W or less
2. Adjustable heat pipe provides excellent compatibility
3. Support 3 x full size expansion cards
4. Support 2 x 2.5" Serial ATA trays
5. Support Slim ODD and IR receiver (optional)



### Specifications :

Front Panel	<ul style="list-style-type: none"> <li>● Power switch x 1.</li> <li>● Power LED x 1.</li> <li>● HDD LED x 1.</li> <li>● USB 2.0 Ports x 2. (3.0 optional)</li> <li>● 2.5" Serial ATA trays x 2.</li> <li>● Slim ODD x 1.</li> <li>● IR receiver x 1 (optional).</li> </ul>
Back Panel	<ul style="list-style-type: none"> <li>● Standard I/O shield x 1.</li> <li>● Expansion slot x 3 (PCI/PCI-e, full length).</li> <li>● Terminal block x 1.</li> </ul>
Internal Structure	<ul style="list-style-type: none"> <li>● Standard memory height.</li> <li>● 2.5" HDD x1.</li> </ul>
Dimension ( WxDxH )	19.00 x 10.53 x 5.20 inch ( 481.8 x 267.55 x 132.0 mm )
Material	SPCC with nickel eletroplating. Brushed aluminum panel with anodized.
Surface	Black wet paint with texture coat.

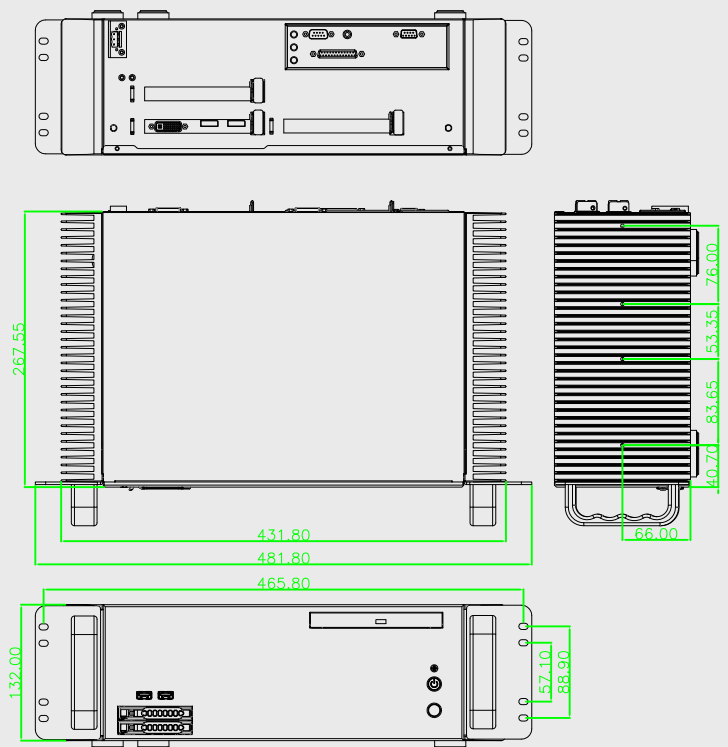

### Power Solutions :

Converter: C4 150W 19V~24V DC in to ATX
Adapter: 120W

UNIT:mm