


Feature :

1. For Mini-ITX Form factor with CPU TDP 65W max.
2. Support 1 x expansion slot for PCI or PCI-E.
3. Support 1 x Optical drive Slim ODD.
4. Support 1 x 2.5" HDD Serial ATA Tray (Full Height).
5. Silent , dust-free & energy - efficient operation.
6. Universal Aluminum Block for LGA 775/1155/1150/1151



Specifications:

Front Panel	<ul style="list-style-type: none"> ● Power switch x 1. ● Power LED x 1. ● HDD LED x 1. ● USB 2.0 Port x 2. ● Optical drive support slim ODD x 1. ● 2.5" HDD Serial ATA Tray x 1. (Full Height)
Back Panel	<ul style="list-style-type: none"> ● Expansion Slot for PCI or PCI-E x 1. ● Terminal block. ● Standard I/O Shield (Not included)
Internal Structure	<ul style="list-style-type: none"> ● 2.5" HDD x 1. ● Universal Aluminum Block for LGA 775/1155/1150/1151
Dimension (WxDxH)	12.6 x 10.3 x 3.7 inch (321.0 x 262 x 93.8 mm)
Material	SGCC Anodized aluminum heatsink
Surface	Black wet paint with texture coat.

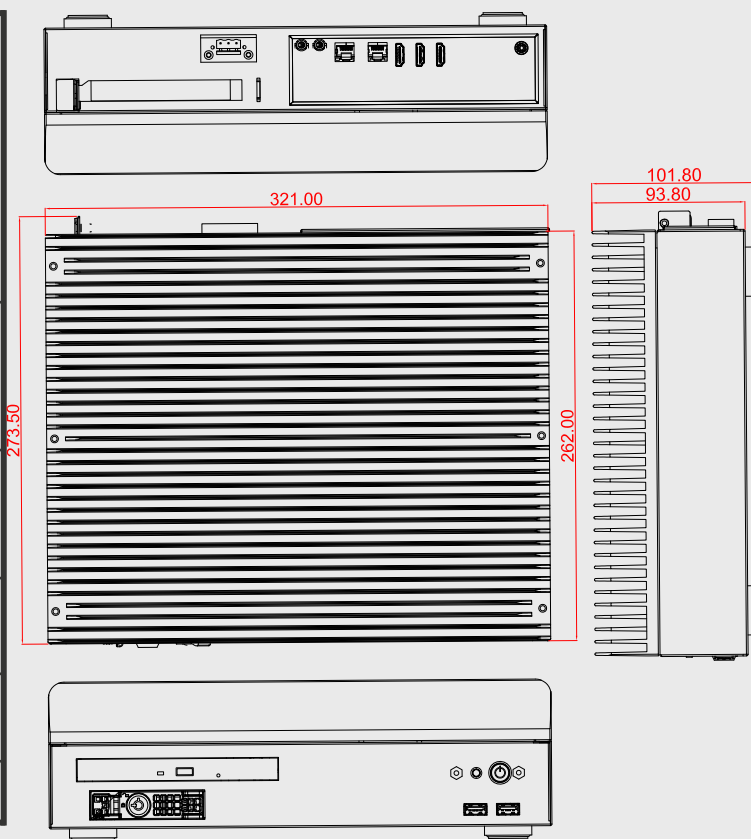

Power Solutions :

Internal Power Supply	External AC adapter
C4 (150W) DC Power board	120 Watts

UNIT:mm