




## Feature :

1. For Mini-ITX board with CPU TDP 65W max.
2. Support 3 x expansion slot for PCIe or PCI
3. 4 x DB9 ports on rear I/O
4. Adjustable heat pipe provides excellent compatibility




## Specifications:

Front Panel	<ul style="list-style-type: none"> <li>● Power switch x 1.</li> <li>● Power LED x 1.</li> <li>● HDD LED x 1.</li> <li>● USB 2.0 Port x 2.</li> <li>● Slim ODD x 1.</li> <li>● IR Receiver x 1 (Optional).</li> </ul>
Back Panel	<ul style="list-style-type: none"> <li>● Standard I/O shield (not included).</li> <li>● Expansion slot x 3.</li> <li>● DB9 port x 4.</li> </ul>
Internal Structure	<ul style="list-style-type: none"> <li>● 3.5" HDD x 1.</li> <li>● 2.5" HDD x 1.</li> </ul>
Dimension ( WxDxH )	9.57 x 10.55 x 6.89 inch ( 243.0 x 268.0 x 175.0 mm )
Material	SPCC with nickel electroplating Brushed and anodized aluminum panel
Surface	Black wet paint with texture coat.

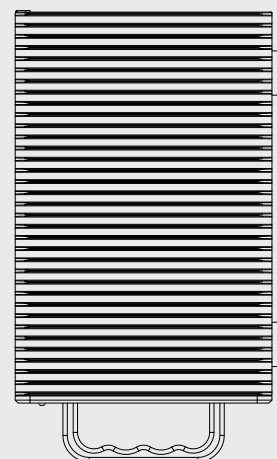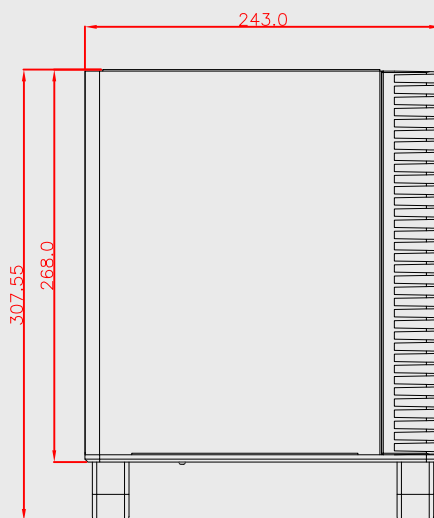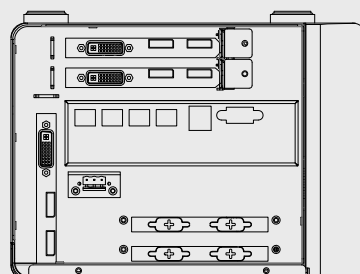

## Power Solutions :

Internal Power Supply	External AC adapter
C4(150W) DC Power board	90 or 120 Watts (19V)

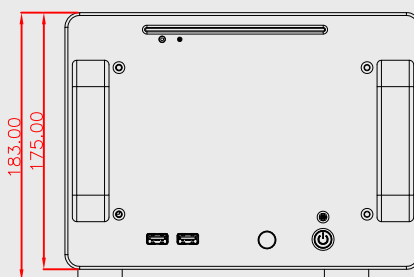

UNIT:mm