



TAWA-T2281

2U 8BAY + PCI RAW LOW PROFILE SLOT

Dimensions:

482.8mm(W) x 461.5mm (D) x 88.0 mm (H) (19.0" x 18.2" x 3.46")

Motherboard Spec.

For Mini ITX (DUAL SYSTEM)

Front Panel:

(Power SW x 1 . Power LED x 1 . HDD LED x 1 .
USB Port x 2) x 2 set .

Back Panel:

(Standard I/O shield (not included) x 1 . AC SOCKET x 1
Expansion PCI Raw Low Profile slot x 1) x 2 set

Drive bays:

INNER : 2.5" HDD x 2
OUTER : Extranal 3.5" SATAII HDD Tray x 8

Cooling Fan:

8 cm Fan x 2(Side)

Power Input:

POWER SUPPLY 250W x 2 or
C9 (120W) Converter x 2





Construction:

Metal chassis
Low Operation temperature

Certifications:

CE approval
FCC approval

RoHS Compliant

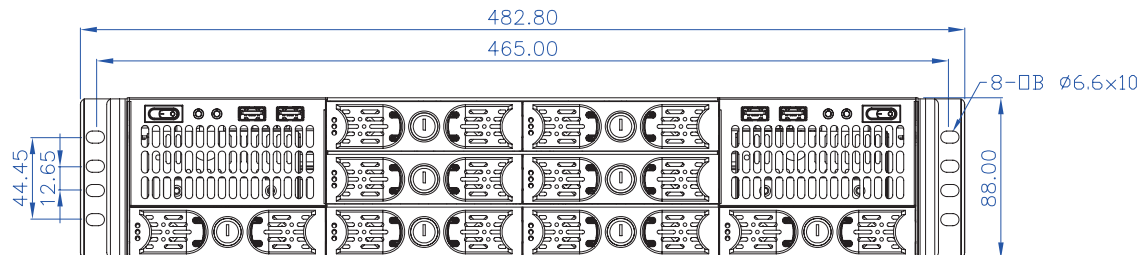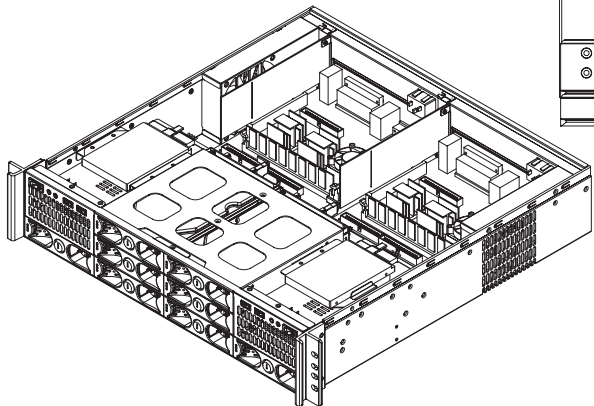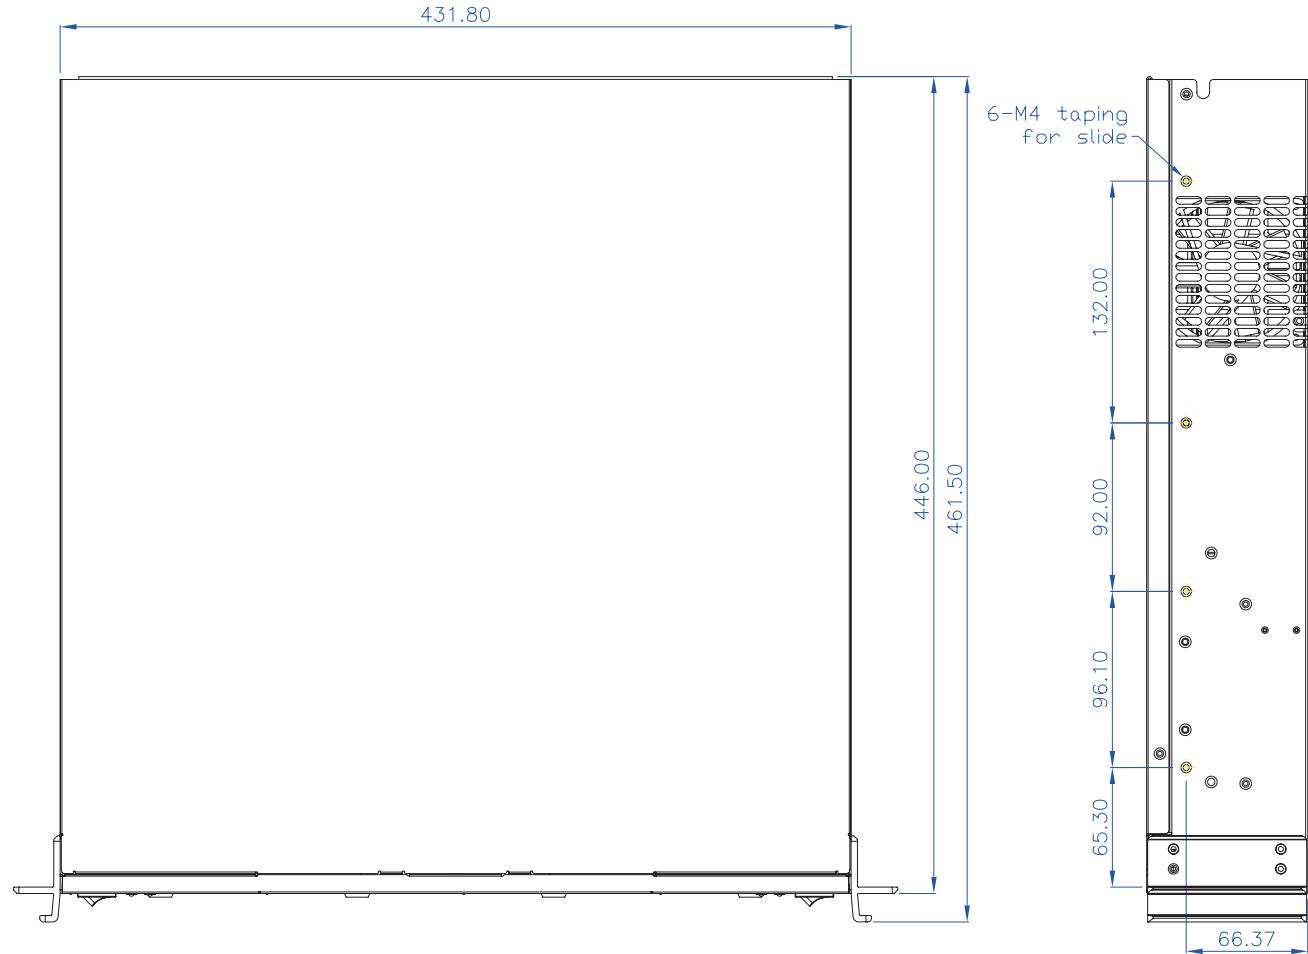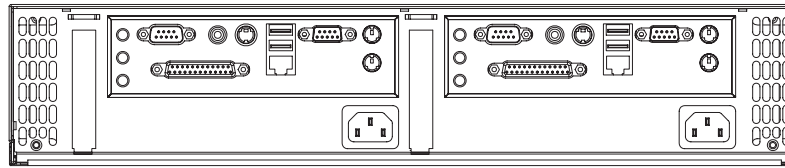

UNIT : mm
Rev : 3
Date : 2010.04.28
PAGE : 1 / 1