


### Feature

1. 3U rackmount server chassis with ATX system
2. Support Flex or 2U redundant power supply .
3. Excellent cooling with 2 x 8 cm fan
4. Support up to 2 x 3.5" hot-swappable HDD trays and 5.25" ODD x 1



### Specifications

|                     |                                                                                                                                    |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Front Panel         | <ul style="list-style-type: none"> <li>● Power switch x 1</li> <li>● Power LED x 1</li> <li>● USB Port x 2</li> </ul>              |
| Back Panel          | <ul style="list-style-type: none"> <li>● Standard I/O shield x 1</li> <li>● Expansion Slot x 7</li> </ul>                          |
| Internal Structure  | <ul style="list-style-type: none"> <li>● 8cm fan x 2</li> <li>● Standard memory height</li> <li>● Internal: 3.5"HDD x 1</li> </ul> |
| Dimension ( WxDxH ) | 19.00 x 19.56 x 5.20 inch<br>( 482.6 x 496.8 x 132 mm )                                                                            |
| Material            | SGCC                                                                                                                               |
| Surface             | Black wet paint with texture coat.                                                                                                 |
| Colour              | Black. Customizable colour.                                                                                                        |

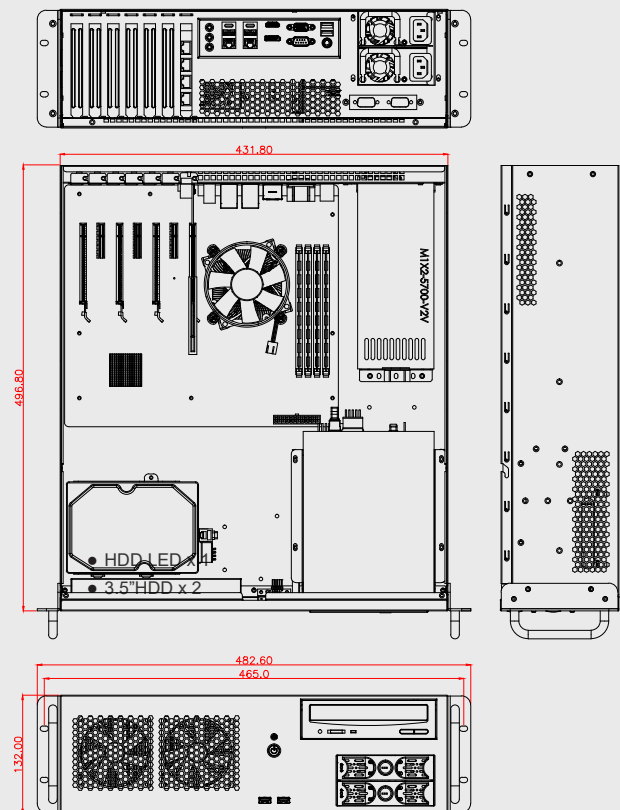

### Power Solutions

|                                                |
|------------------------------------------------|
| Internal Power Supply                          |
| Flex Power Supply or 2U Redundant Power Supply |

UNIT:mm